

Information about joint sealants can be found in details OR-E-105 and OR-E-106.


#### Attention!

Joints always at same level for cover flashings as for horizontal panel joint!  
Never install two flashings together with screws in length direction!

Always use a tape roller on sealant tapes to ensure maximum sealant effectivity!



Panel joints

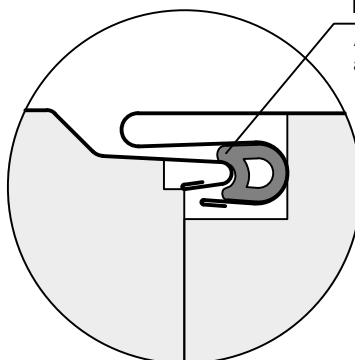

Factory applied sealant or joint compound (TT-13)

Always use joint sealant compound at panel ends and behind flashing and column

