


Information about joint sealants can be found in details OR-E-105 and OR-E-106.

Attention!

Joints always at same level for cover flashings as for horizontal panel joint!
Never install two flashings together with screws in length direction!

Always use a tape roller on sealant tapes to ensure maximum sealant effectivity!

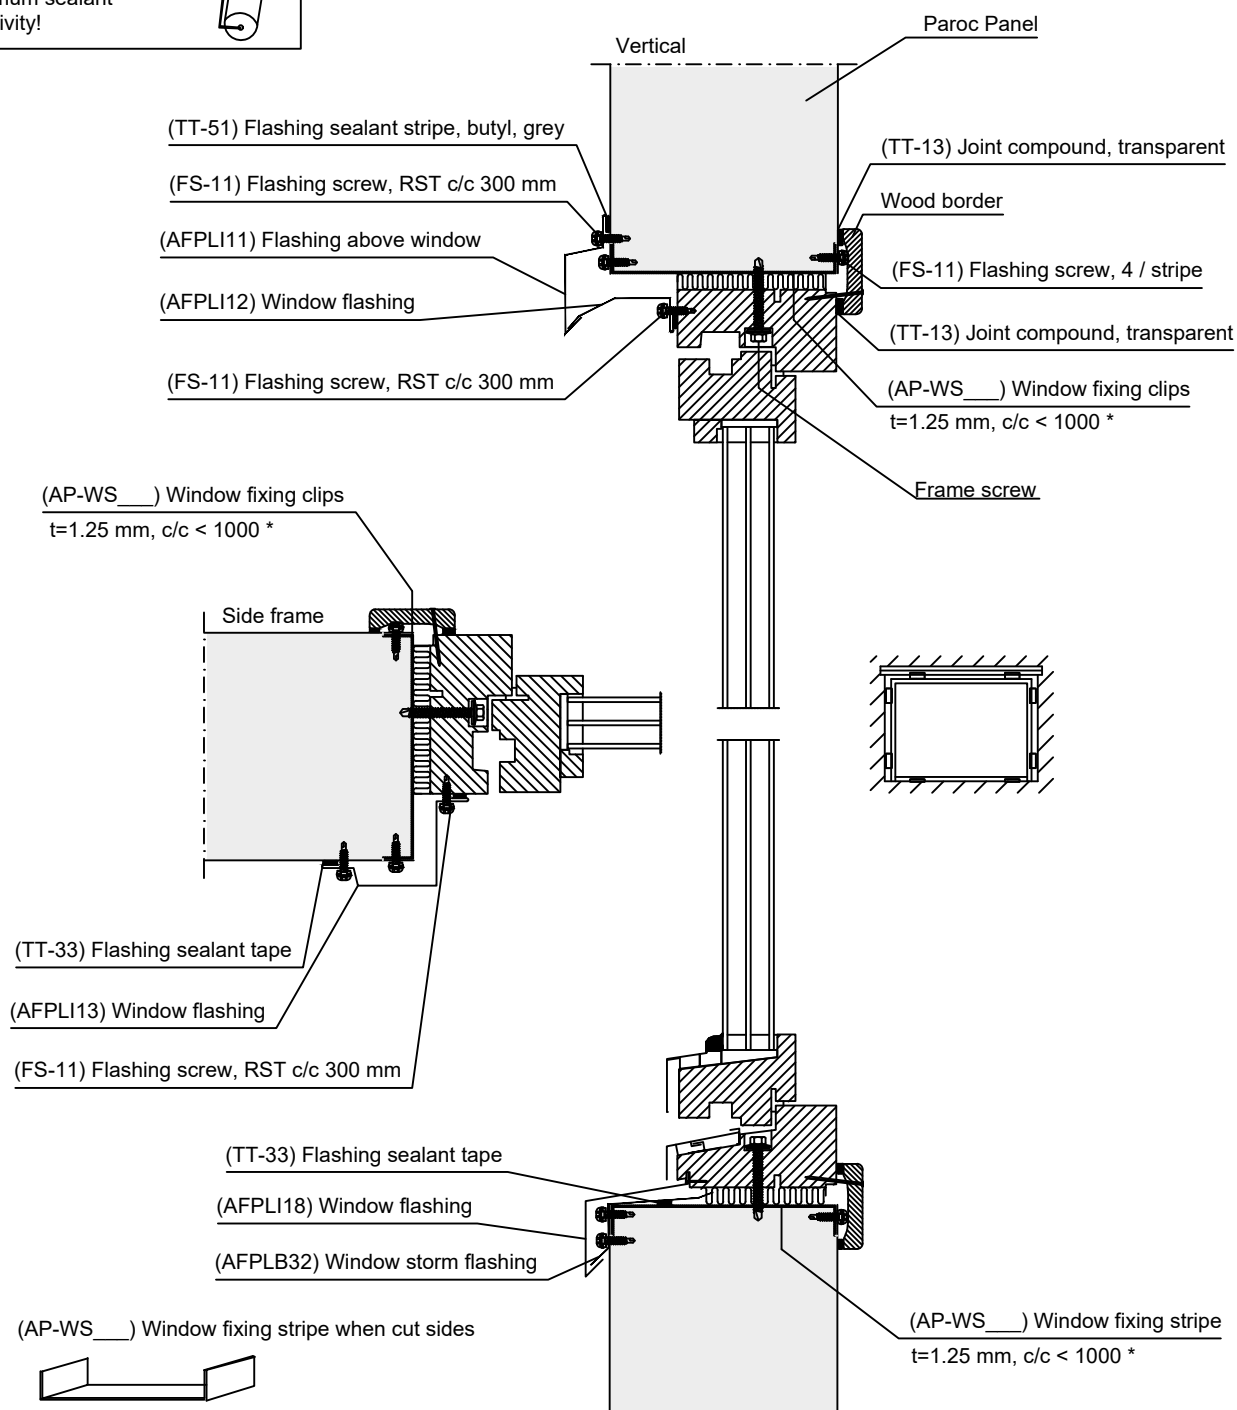

* Maximum allowed load/clip: 0.5 kN

[X] Supplier Paroc Panel System