



|                     |  |                     |            |
|---------------------|--|---------------------|------------|
| Paroc Panel System: | Original   | Detail No.:         | OR-E-508   |
| Type:               | Cladding Detail  | Scale:              | 1:5        |
| Subject:            | Gable eave<br>Roof with bitumen waterproofing<br>Horizontal or vertical installation | Revision:           | A          |
|                     |  | Date:               | 02/2012    |
|                     |  | Revision Date:      | 26.04.2021 |
|                     |  | Signature:          | KjN        |
|                     |  | Revision Signature: | JeN        |

Notice: Principle Master Detail

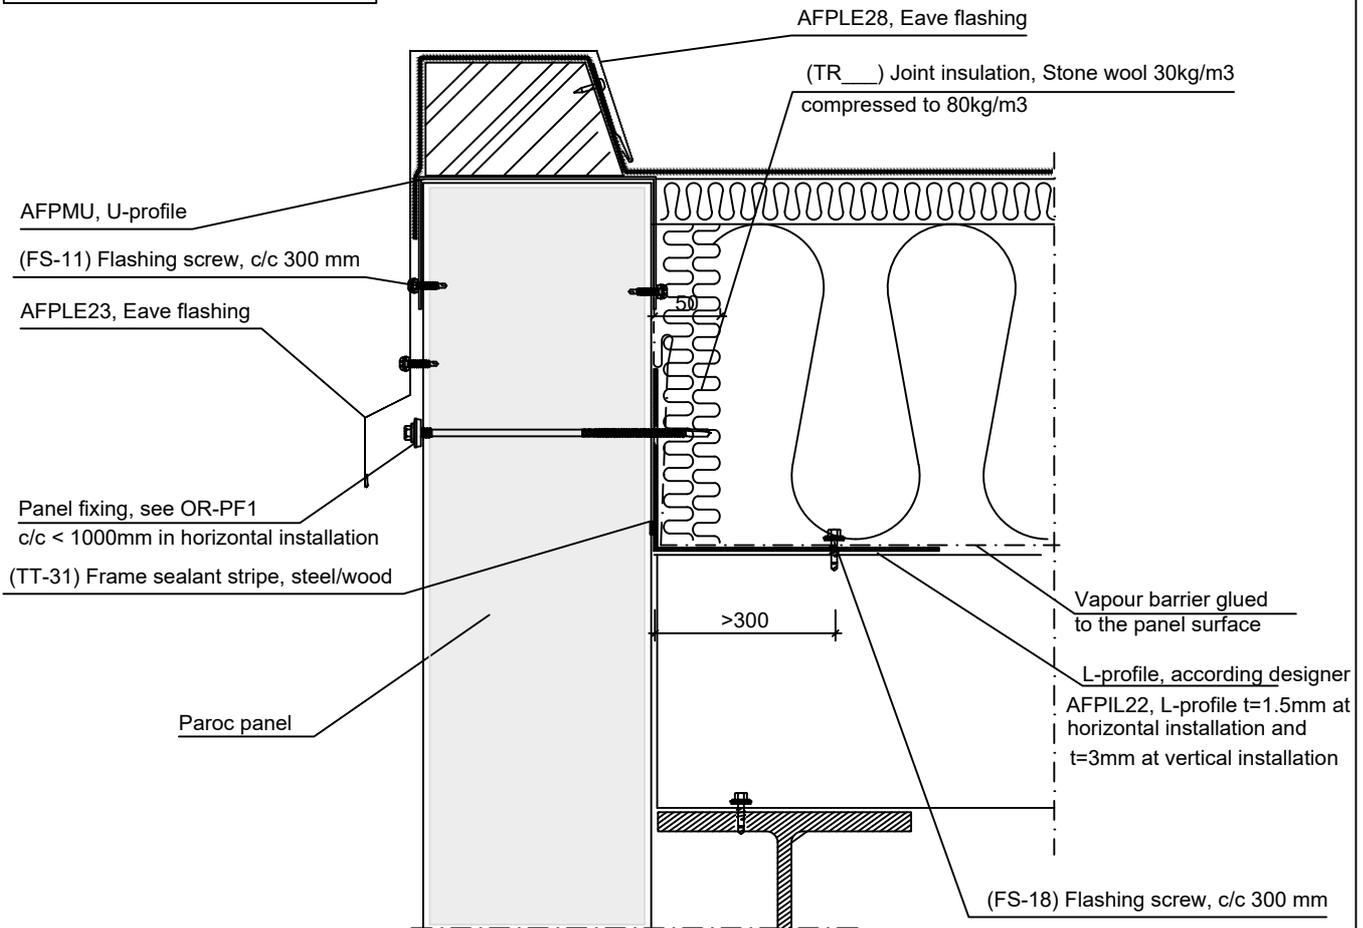
Project specific changes on designer's responsibility

Copyright Paroc Panel System 2019-07-01

Information about joint sealants can be found in details OR-E-105 and OR-E-106.

**Attention!**  
 Joints always at same level for cover flashings as for horizontal panel joint!  
 Never install two flashings together with screws in length direction!

Always use a tape roller on sealant tapes to ensure maximum sealant effectivity!

This detail has been done to help architects, engineers and installers when using PAROC panels. Before using this detail, check latest version at [www.parocpanels.com](http://www.parocpanels.com)