



Paroc Panel System:	Original	Detail No.:	OR-E-204
Type:	Cladding Detail	Scale:	1:5
Subject:	Paroc Panel fixing to base with L-profile on internal side of panel Vertical installation	Revision:	A
		Date:	02/2012
		Revision Date:	08.12.2020
		Signature:	KjN
		Revision Signature:	JeN

Notice: Principle Master Detail

Project specific changes on designer's responsibility


Copyright Paroc Panel System 2019-07-01

Information about joint sealants can be found in details OR-E-105 and OR-E-106.

Always use a tape roller on sealant tapes to ensure maximum sealant effectivity!




External and internal joint

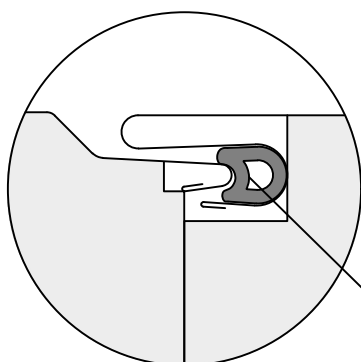

(TT-13) Joint compound, transparent

Factory applied sealant or joint compound (TT-13)

External and internal joint at panel ends and behind flashings and column

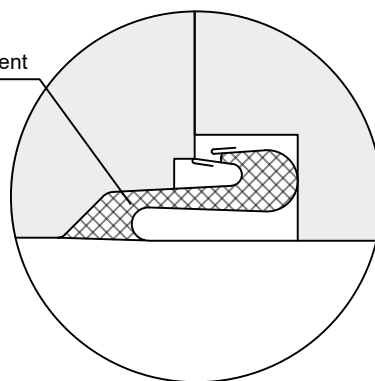

(TT-51) Flashing sealant stripe, butyl, grey


(FS-11) Flashing screw, RST c/c 300 mm

Panel fixing, see OR-PF1

AFPLD52A, Socket flashing

AFPLD53, Socket safety flashing

(FC-11) Spike, carbon steel, concrete

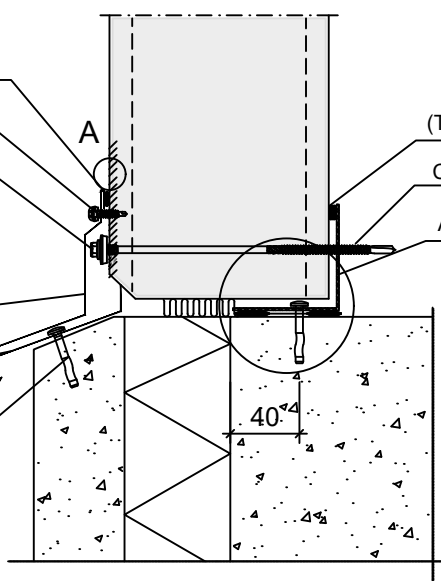

(TT-31) Frame sealant stripe, steel/wood

Cut after installation with bolt-scissor if needed


AFPIL13, L-profile

40°

(FC-11) Spike, carbon steel, concrete

(TR___) Joint insulation, Stone wool

(TT-61) Foundation sealant, EPDM

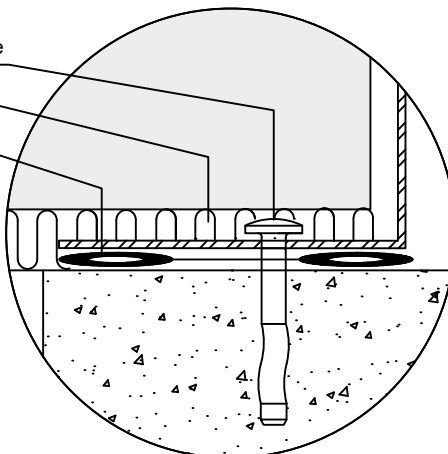

[X] Supplier Paroc Panel System