

Information about joint sealants can be found in details OR-E-105 and OR-E-106.



Attention!

Joints always at same level for cover flashings as for horizontal panel joint!
Never install two flashings together with screws in length direction!


Always use a tape roller on sealant tapes to ensure maximum sealant effectivity!



A

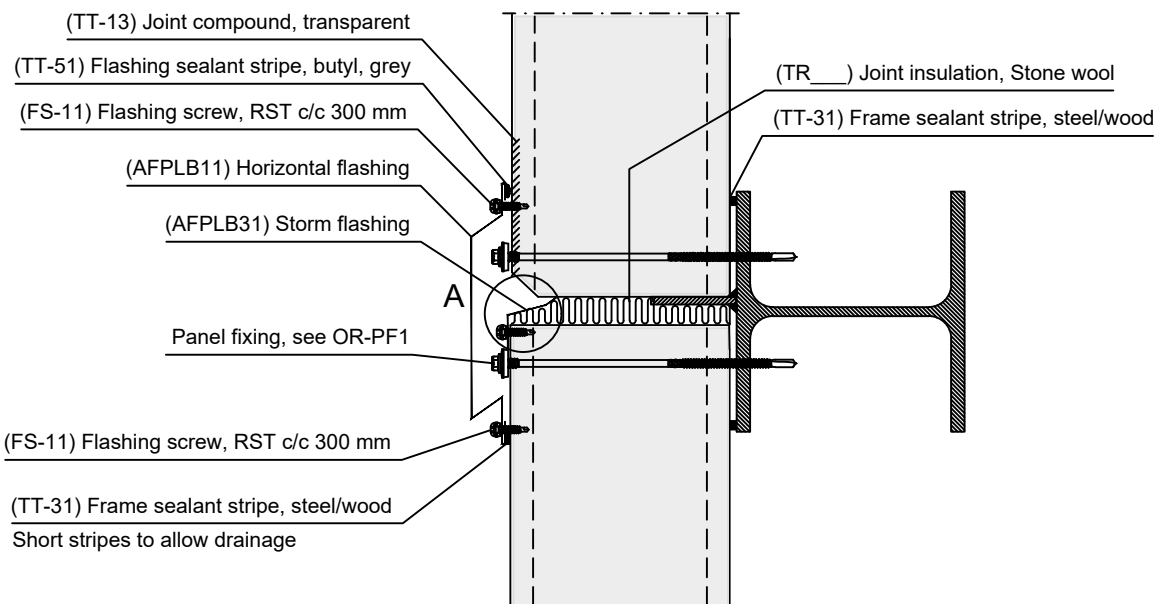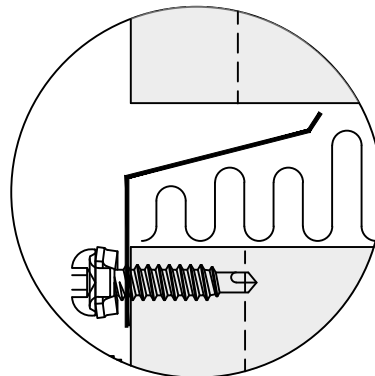


External and internal joint

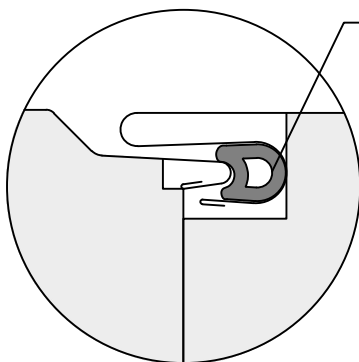

Factory applied sealant, or joint compound installed at building site (TT-13)

External and internal joint at panel ends and behind flashings and column

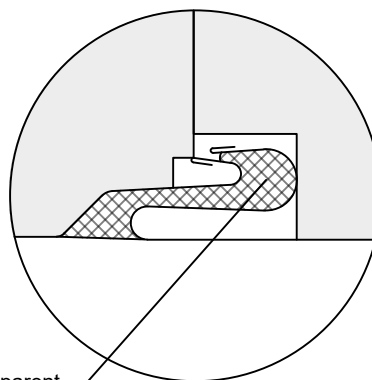

(TT-13) Joint compound, transparent

[X] Supplier Paroc Panel System