
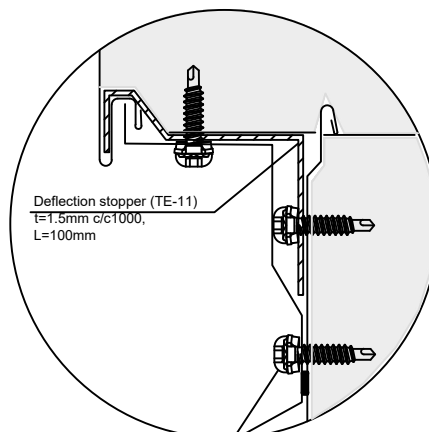


Information about joint sealants can be found in details OR-E-105 and OR-E-106.

#### Attention!

Joints always at same level for cover flashings as for horizontal panel joint!  
Never install two flashings together with screws in length direction!

Always use a tape roller on sealant tapes to ensure maximum sealant effectivity!

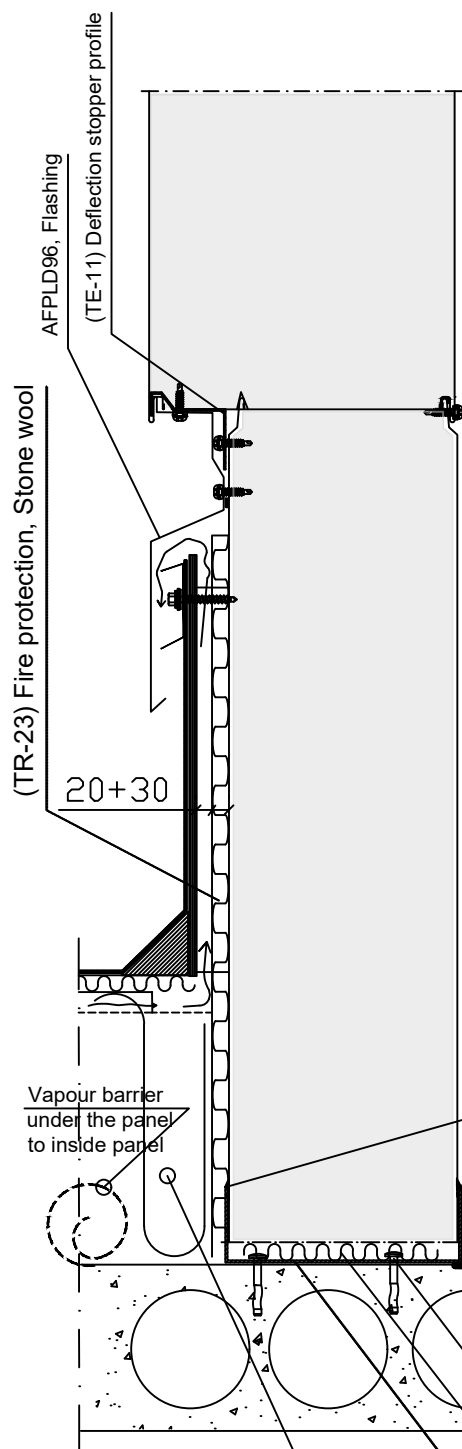

(FS-11) Flashing screw, RST c/c 300 mm

See also detail  
OR-E-242

Roof system for  
example paroc ROB+ ROS

(FC-11) Spike, carbon steel, concrete

(TR-\_\_\_) Joint insulation, Stone wool

AFPMU, U-profile, exterior