



Paroc Panel System:	Original	Detail No.:	OR-E-722
Type:	Ventilation room detail	Scale:	1:5
Subject:	Installation of door Horizontal or vertical installation	Revision:	A
		Date:	10.06.2014
		Revision Date:	26.04.2021
		Signature:	KjN
		Revision Signature:	JeN

Notice: Principle Master Detail

Project specific changes on designer's responsibility




Copyright Paroc Panel System 2019-07-01

Information about joint sealants can be found in details OR-E-105 and OR-E-106.



**Attention!**

Joints always at same level for cover flashings as for horizontal panel joint!  
Never install two flashings together with screws in length direction!

Always use a tape roller on sealant tapes to ensure maximum sealant effectivity!

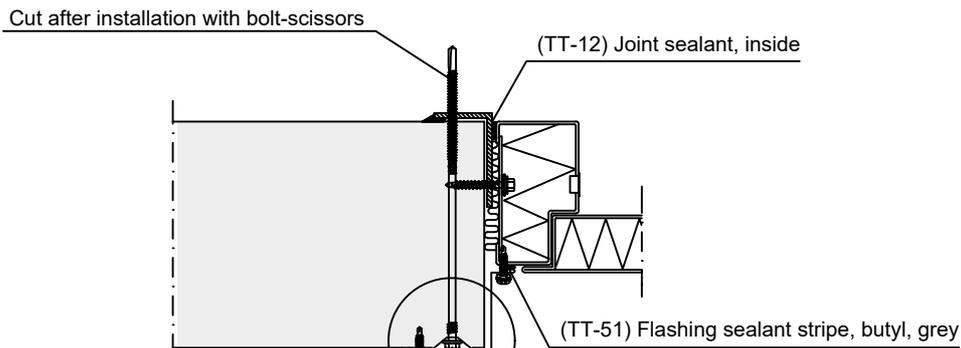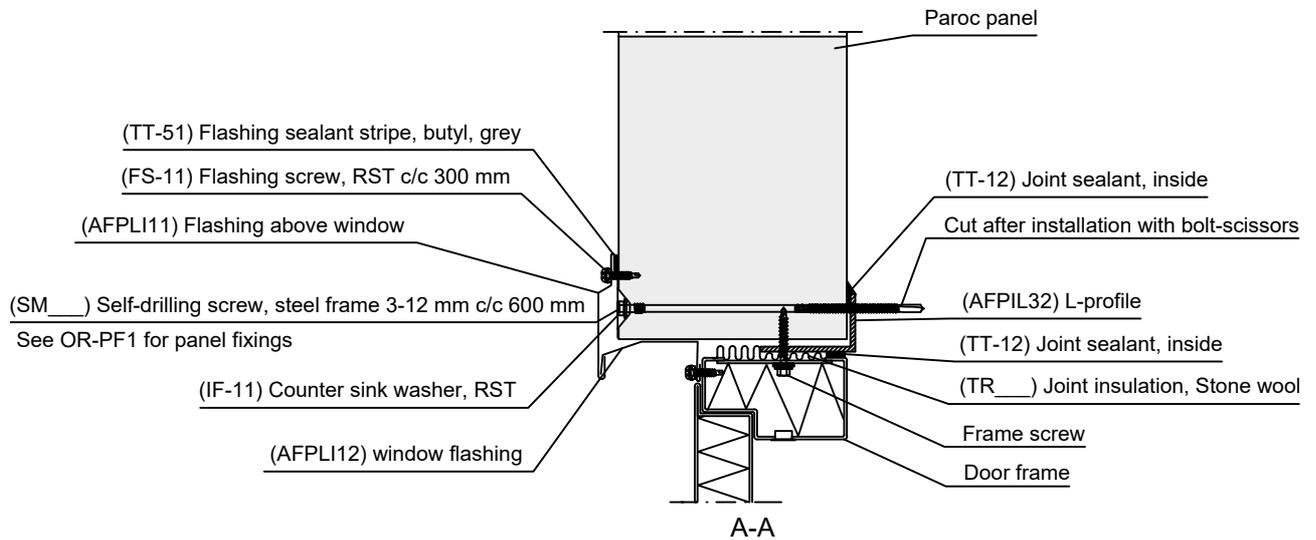

- (TT-51) Flashing sealant stripe, butyl
- (FS-11) Flashing screw, c/c 300 mm
- (AFPLI13) Window flashing
- (SM\_\_\_) Self-drilling screw, steel frame 3-12 mm



This detail has been done to help architects, engineers and installers when using PAROC panels. Before using this detail, check latest version at [www.parocpanels.com](http://www.parocpanels.com)