


Information about joint sealants can be found in details OR-E-105 and OR-E-106.

Attention!

Joints always at same level for cover flashings as for horizontal panel joint!
Never install two flashings together with screws in length direction!

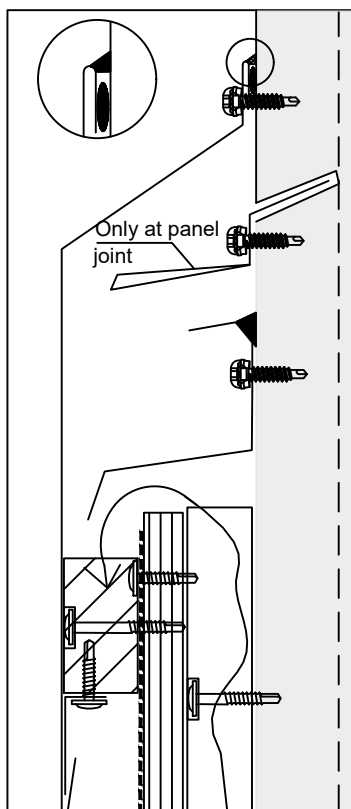

(TT-13) Joint sealant, outside, transparent

(TT-51) Flashing sealant stripe, butyl, grey

(FS-11) Flashing screw, RST c/c 300 mm

AFPLD62, Socket flashing

V-shaped flashing through
the panel joint (length 100mm)

(TT-13) Joint sealant, outside, transparent

(FS-11) Flashing screw, RST c/c 300 mm

AFPLD16, Safety flashing

Plywood pieces c/c 600

Paroc Panel

(TT-31) Frame sealant stripe, steel/wood

Panel fixing type, see OR-PF1

Amount of fastener, contact Paroc Panel System

Waterproofing

(FS-13) Flashing screw, RST c/c 300 mm

AFPIL21, L-Profile t= 1.5mm

Vapour barrier glued to the panel