


Information about joint sealants can be found in details OR-E-105 and OR-E-106.


**Attention!**

Joints always at same level for cover flashings as for horizontal panel joint!  
 Never install two flashings together with screws in length direction!  
 Use butyl tape over the support flashings!


Always use a tape roller on sealant tapes to ensure maximum sealant effectivity!

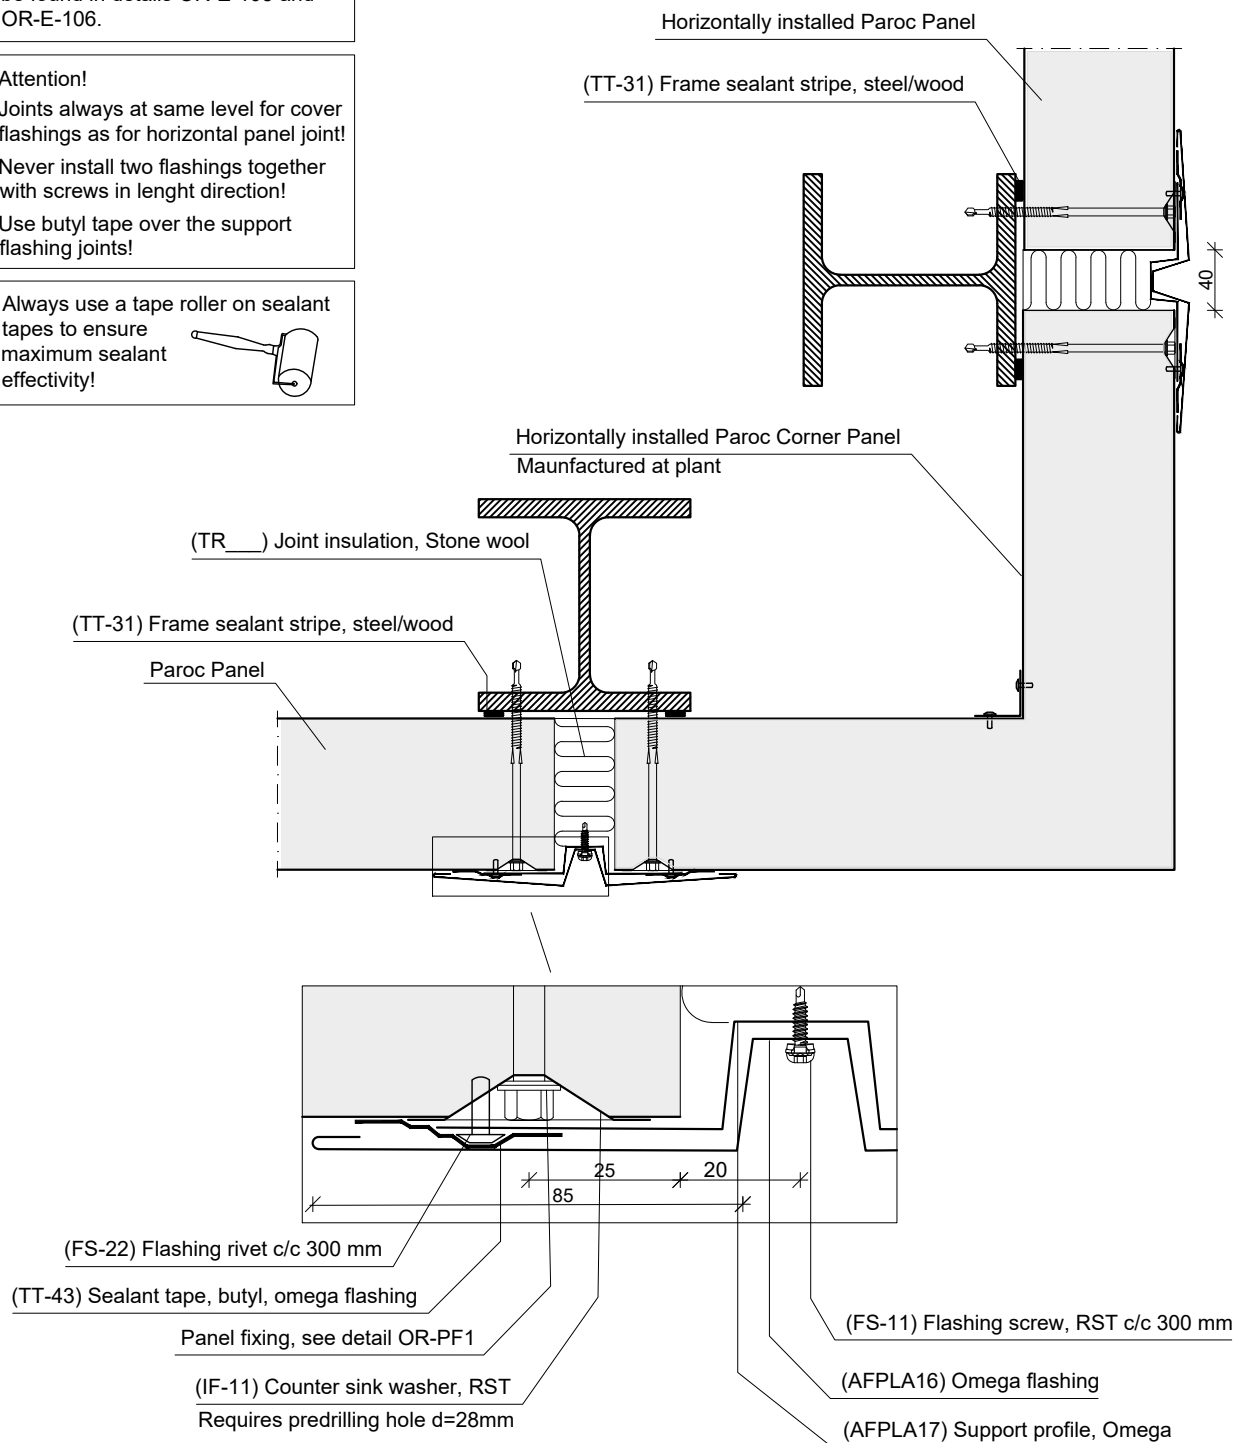

Omega flashing system type 2



(AFPLA17) Support profile, Omega  
 Length 2395 mm, thickness = 0.6 - 0.7 mm



(AFPLA16) Omega flashing

[X] Supplier Paroc Panel System